
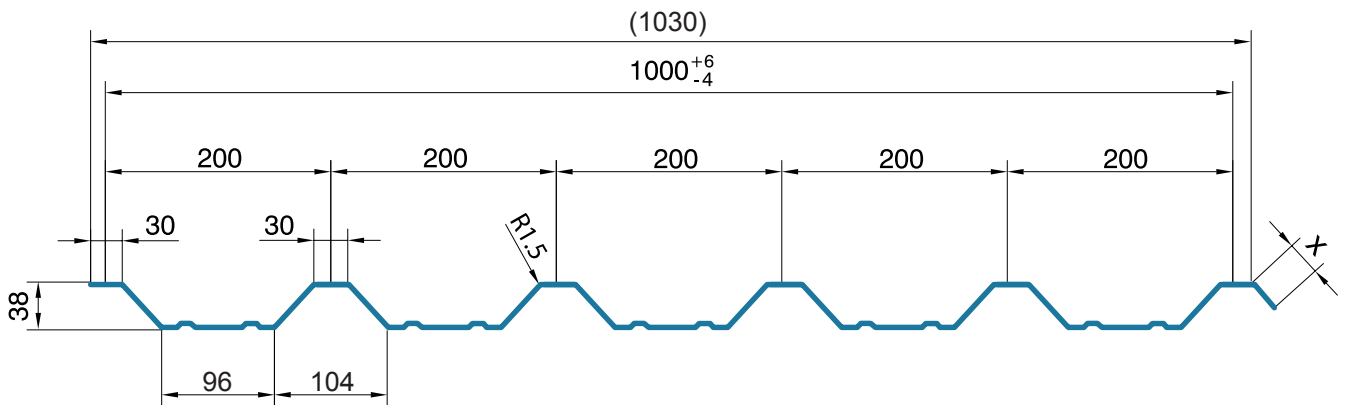


PROFILED SHEET ~ EK 38 / 200 STEEL (GI)

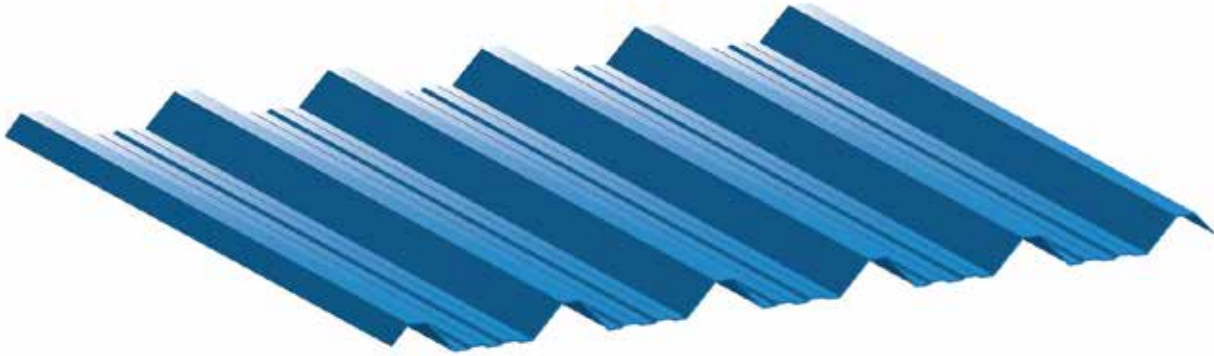

Allowable Working Loads (N/m²)

Thickness in mm	0.40		0.46		0.50		0.60		0.70		0.80		0.90	
Weight Kgs/Sqm	3.831		4.405		4.789		5.746		6.704		7.662		8.619	
Span in mm	S	M	S	M	S	M	S	M	S	M	S	M	S	M
1000	3863	4829	4426	5532	4798	5997	5720	7150	6629	8287	7527	9408	8412	10515
1250	2473	3091	2832	3540	3071	3838	3661	4576	4243	5303	4817	6021	5384	6730
1500	1717	2146	1967	2459	2132	2665	2542	3178	2946	3482	3345	4181	3739	4673
1750	1262	1577	1445	1806	1567	1958	1868	2335	2165	2706	2458	3072	2747	3433
2000	966	1207	1106	1383	1199	1499	1430	1787	1657	2072	1882	2352	2103	2629

Allowable Working Loads are in N/m² and Limiting Deflection L/200
All are Nominal Values

S = Single Span, M = Multi Span