


## PROFILED SHEET ~ EK 45 / 250 STEEL (GI)

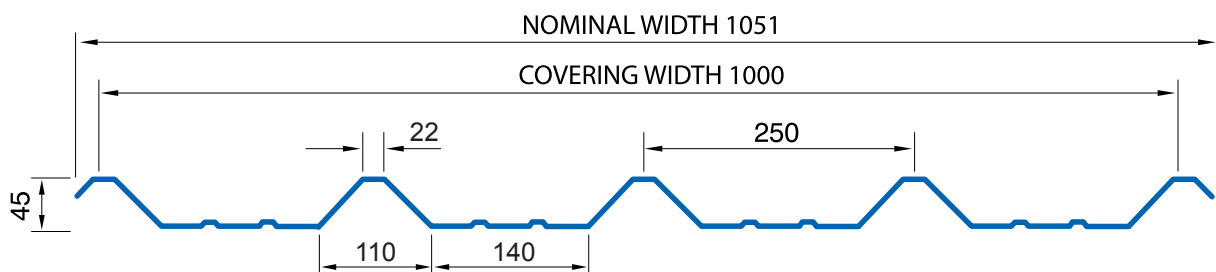

### Allowable Working Loads (N/m<sup>2</sup>)

Thickness in mm	0.50		0.60		0.70		0.80		0.90		1.00	
Weight Kgs/Sqm	4.78		5.74		6.70		7.66		8.61		9.57	
Span in mm	S	M	S	M	S	M	S	M	S	M	S	M
1000	7890	9870	9450	11820	11000	13770	12560	15710	14100	17640	15640	19570
1250	5050	6320	6050	7560	7040	8810	8040	10050	9030	11290	10010	12520
1500	3510	4390	4200	5250	4890	6120	5580	6980	6270	7840	6950	8690
1750	2440	3220	2930	3860	3410	4490	3900	5130	4390	5760	4880	6390
2000	1630	2470	1960	2950	2290	3440	2610	3930	2940	4410	3270	4890

Allowable Working Loads are in N/m<sup>2</sup> and Limiting Deflection L/200  
All are Nominal Values

S = Single Span, M = Multi Span