
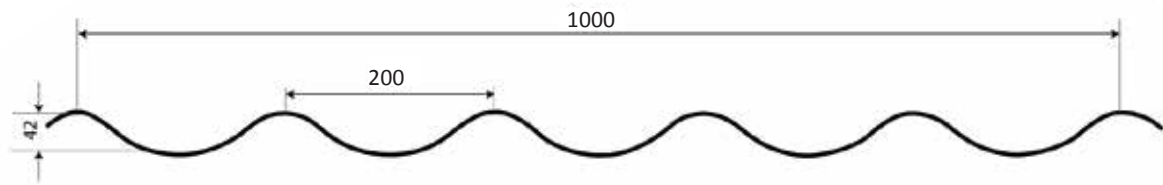


## PROFILED SHEET ~ EK TILE 42 / 200 STEEL (GI)

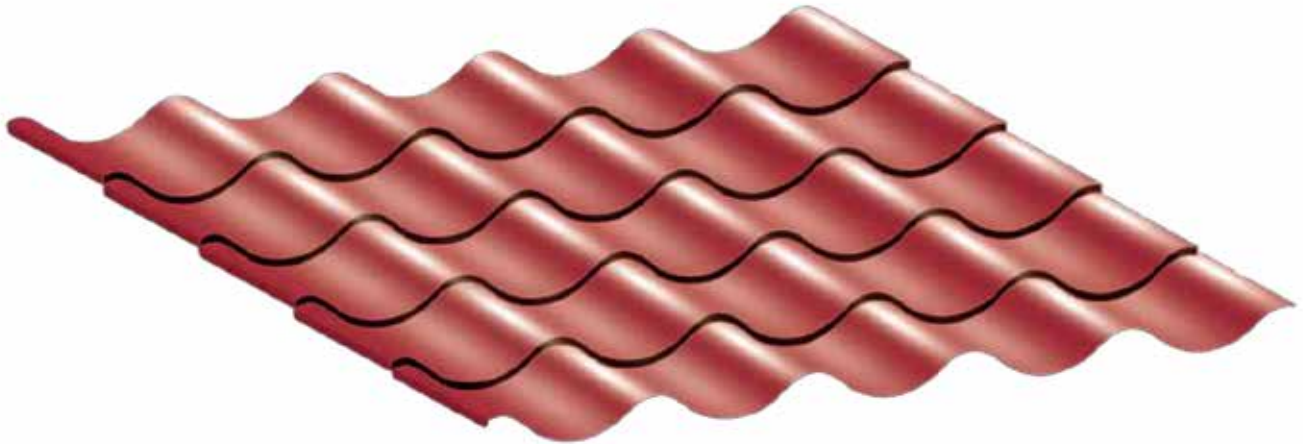

### Allowable Working Loads (N/m<sup>2</sup>)

Thickness in mm	0.50		0.60		0.70		0.80		0.90		1.00	
Weight Kgs/Sqm	4.33		5.20		6.07		6.93		7.80		8.66	
Span in mm	S	M	S	M	S	M	S	M	S	M	S	M
1000	8290	10370	9930	12420	11560	14460	13180	16490	14800	18520	16350	20450
1250	5310	6640	6350	7950	7400	9250	8440	10550	9480	11850	10460	13090
1500	3680	4610	4410	5520	5140	6420	5860	7330	6580	8230	7270	9090
1750	2550	3390	3060	4050	3560	4720	4080	5380	4590	6050	5090	6680
2000	1710	2590	2050	3100	2390	3610	2730	4120	3070	4630	3410	5110

Allowable Working Loads are in N/m<sup>2</sup> and Limiting Deflection L/200  
All are Nominal Values

S = Single Span, M = Multi Span