


## PROFILED SHEET ~ EK 38 / 200 ALUMINIUM

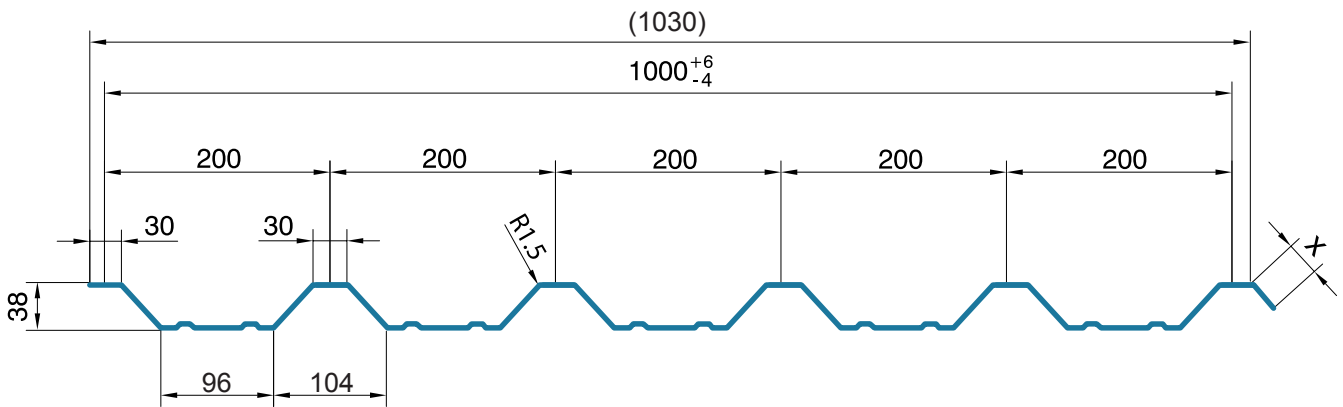

### Allowable Working Loads (N/m<sup>2</sup>)

Thickness in mm	0.50		0.60		0.70		0.80		0.90		1.00		1.20	
Weight Kgs/Sqm	1.653		1.984		2.314		2.645		2.976		3.306		3.967	
Span in mm	S	M	S	M	S	M	S	M	S	M	S	M	S	M
1000	2225	2780	2653	3316	3074	3842	3490	4362	3902	4876	4306	5382	5100	6374
1250	1424	1780	1698	2122	1968	2460	2234	2792	2497	3121	2756	3445	3264	4080
1500	989	1236	1179	1474	1366	1708	1551	1939	1734	2167	1914	2392	2267	2833
1750	632	908	753	1083	872	1255	990	1425	1106	1592	1758	1220	1443	2082
2000	423	677	504	807	584	935	663	1061	741	1185	1308	817	967	1547

Allowable Working Loads are in N/m<sup>2</sup> and Limiting Deflection L/200  
All are Nominal Values

S = Single Span, M = Multi Span